

# WRAPPING

## V-PACK 3

for round, flat base & asymmetrical products


- Flexibility
- High efficiency
- Gentle product handling



### V-PACK 3

speed up to 550 ppm depending on product

#### models

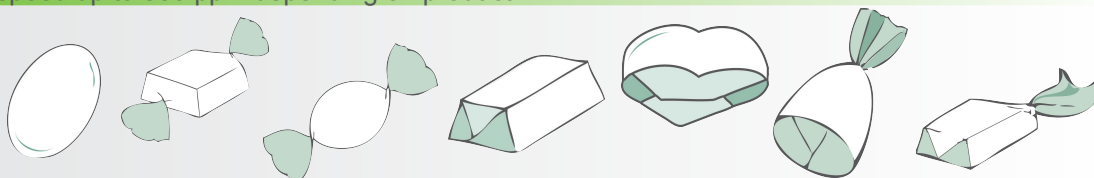

### NEW

Wrapping machine combining flexibility, high performances and gentle handling of delicate pralines. The ideal solution to be integrated in highly efficient distribution systems by counter molds.

#### standard features

- All-round hygienic design with cantilever structure
- Full product accessibility
- Gentle product handling with significant reduction of cleaning downtimes
- Limitation of product damaging & marking
- FAST CHANGE OVER: 30 min (same product) 60 min (different product)
- Automatic splicing unit
- Print orientation of wrapping foil
- Industry 4.0 approach
- 10' HMI with color graphic touch screen, including 3-level handling menu
- Remote assistance & data collection


#### optionals

- Additional reel holder for double wrapping material
- Spliced product reject device
- Printing/ labelling unit
- Electronic remote setup
- Rear or front outfeed according to customer needs

## technical data

	V-PACK 3
total weight	2800 Kg
total installed power	12 Kw
supply pressure   average consumption	6 bar   800 NI/ min
paint	RAL 7035 Gloss 80


## product size range

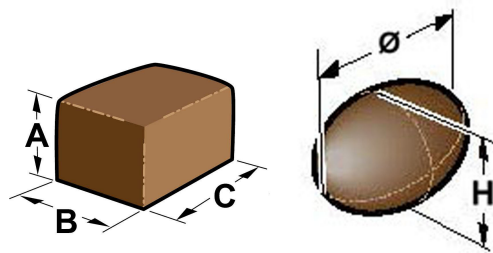

mm	A	B	C	Ø	H
min	5	18	20	18	18
max	25	35	45	35	44

Dimension next or beyond the limits of the above range to be evaluated

## layout

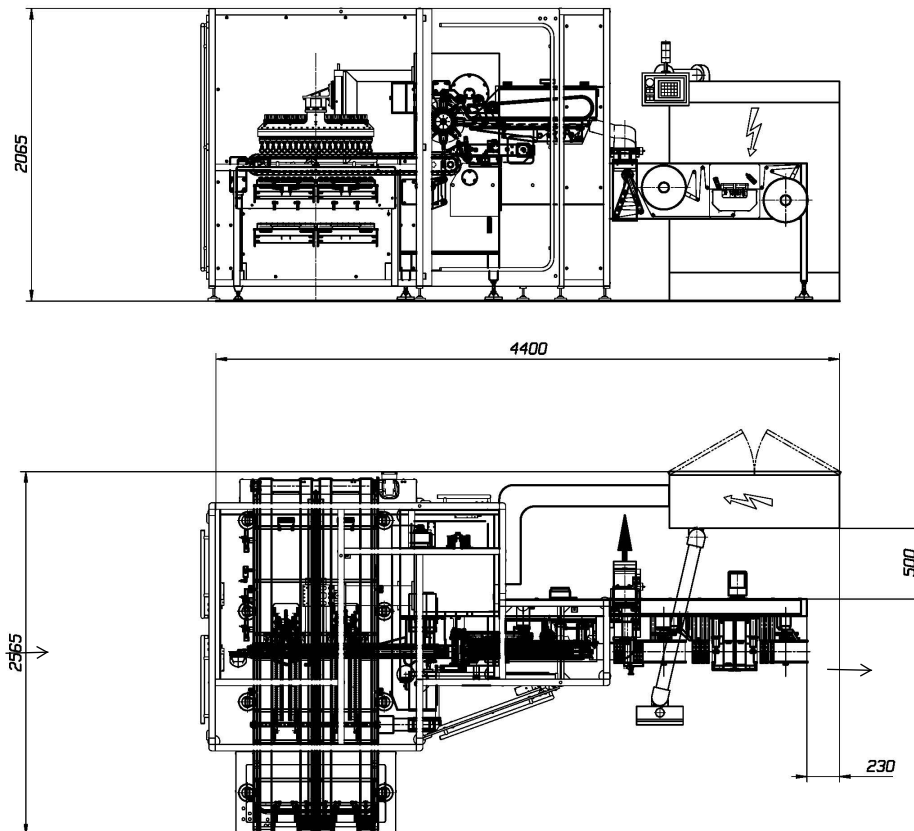

### CMFima S.r.l.

Via Ca' Bianca, 730  
 40024 | Castel San Pietro Terme (BO) | Italy  
 Phone +39 051.07 09 011  
 Fax +39 051.07 09 012  
[www.cm-fima.com](http://www.cm-fima.com)

